

APOLLO BY NORA®

3" SPECIFICATION GRADE LUMINAIRES
ROUND OR SQUARE APERTURE
FLANGED / FLANGELESS / WOOD CEILING

Scan for info.



Introducing Apollo - a sleek, three-inch recessed lighting solution that combines cutting-edge COB LED technology with architectural-grade finishes and advanced TIR optics. Available in flanged and trimless options, Apollo is ideal for millwork applications, offering exceptional glare control and a range of versatile dimming protocols. Whether you're illuminating residential or commercial spaces, Apollo ensures a seamless blend of style and performance, with a focus on precision and efficiency.

FEATURES

- 3" Round or Square Aperture
- Adjustable Mechanism (361° rotation / 45° tilt) without Glare
- Delivering 800 to 3000 lumens
- IC Air-Tight Housing includes COB LED assembly
- Dedicated CCT or Comfort Dim (2700K, 3000K, 3500K, 4000K, Warm Dimming)
- COB LED Technology with TIR optics (10° Narrow Spot to 55° Flood)
- Phase, 0-10V, Lutron, DALI, Casambi Dimming down to 0.1%
- Flanged and Trimless Millwork Installations
- Remote Emergency option
- 5-Year Limited Warranty
- ENERGY STAR certified
- Title 24 compliant


Extruded Aluminum Heat Sink
with COB LED technology
(Serviceable from below the ceiling)

Dimmable down to 0.1%
Phase, 0-10V, Lutron, DALI, Casambi
(Serviceable from below the ceiling)

Precise Aiming & Locking
361° Rotation • 45° Tilt



Detachable Roof
Easy maintenance with above ceiling access

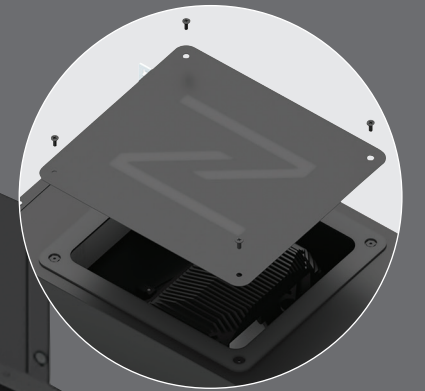

Field Changeable TIR Optics
26° Spot to 55° Narrow Flood
(10° to 15° optics are fixed)

Romex Strain Relief
Accepts two NM cables



Reinforced Bar Hangers
with two locking positions


Mud Ring
Die-Cast Aluminum with Knife Edge Appearance

Field Changeable Collars
Accommodates ceiling thickness
from 0.5" to 2"

Die-Cast Trims
Downlight, Pinhole or Wall Wash
Flanged or Flangeless




APOLLO BY NORA®

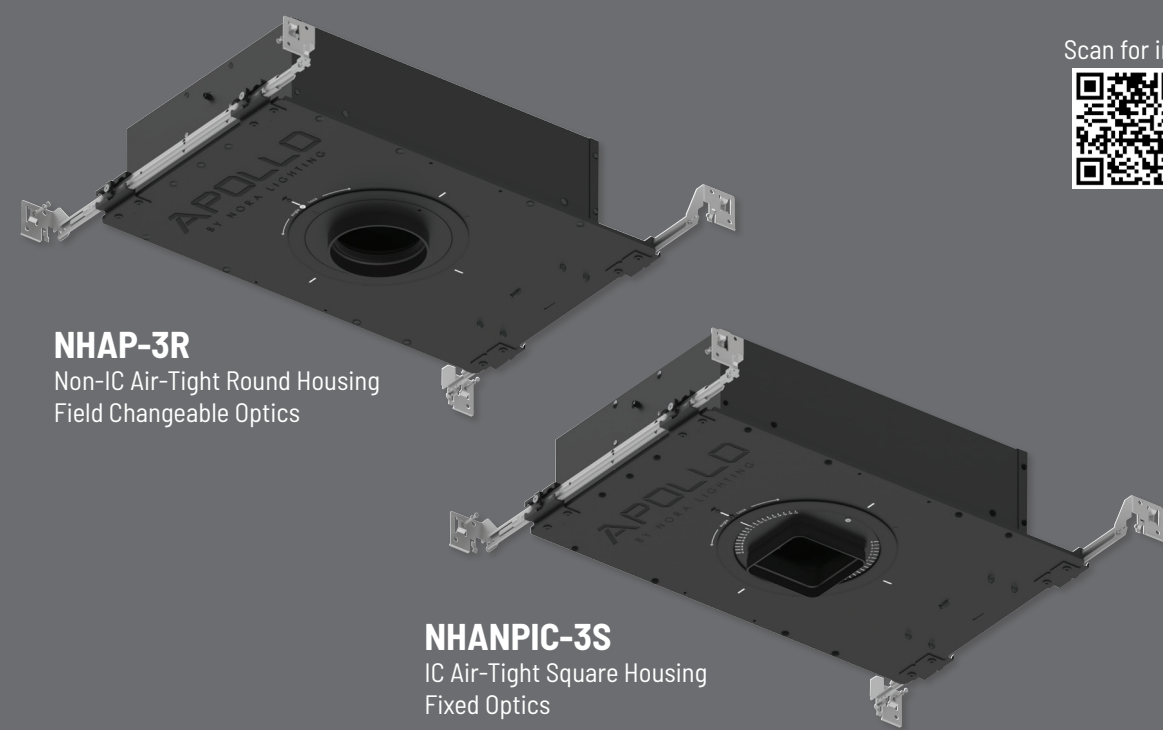

COB LED with TIR Optic

2700K	3000K
3500K	4000K

Dedicated CCT
with 90+ CRI




TIR Optics range
from 10° to 55°

Precise Aiming & Locking



0° Tilt



45° Tilt



361° Rotation




Tool-Free Locking

Housing Order Matrix

APERTURE	CEILING THICKNESS	LUMENS / WATTAGE	CCT	BEAM SPREAD	DIMMING	EMERGENCY
NHAPNIC-3R (IC Round) Fixed Optic	05 (0.5" - 0.875")	L1 (700lm / 10W)	27 (2700K)	10D (10° Spot)	P (Phase 1%)	/PEM (Pre-Wired for Remote Emergency)
NHAPNIC-3S (IC Square) Fixed Optic	10 (0.875" - 1.25")	L2 (1000lm / 20W)	30 (3000K)	12D (12° Spot)	C (0-10V 1%)	
	15 (1.25" - 1.625")	L3 (1500lm / 24W)	35 (3500K)	15D (15° Spot)	C01 (0-10V 0.1%)	
	20 (1.625" - 2")		40 (4000K)		CAS (Casambi 1%)	
NHAPIC-3R (IC Round) Field Changeable Optic		L1 (1000lm / 10W)	27 (2700K)	25D (26° Spot)	DAL (DALI-2 1%)	
NHAPIC-3S (IC Square) Field Changeable Optic		L2 (1500lm / 15W)	30 (3000K)	40D (38° NFL)	AWNR (Lutron Athena 1%)	
		L3 (2000lm / 20W)	35 (3500K)	55D (55° Flood)	L01 (Lutron Ecosystem 0.1%)	
			40 (4000K) CD (Comfort Dim)			
NHAP-3R (Non-IC Round) Field Changeable Optic		L4 (2500lm / 24W)	27 (2700K)		T (Phase or 0-10V 1%)	
NHAP-3S (Non-IC Square) Field Changeable Optic		L5 (3000lm / 30W)	30 (3000K)		CAS (Casambi 1%)	
			35 (3500K)		DAL (DALI-2 1%)	
			40 (4000K)		AWNR (Lutron Athena 1%) L01 (Lutron Ecosystem 0.1%)	

Accessories

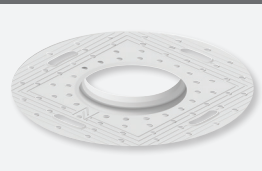

NAP-TLMR-3R Round
NAP-TLMR-3S Square
Trimless Mud Plates



NAPC-3R Round
NAPC-3S Square
Replacement Collars



NAP-3D25 25°
NAP-3D40 38°
NAP-3D55 55°
Replacement TIR Optics



NAP-3RDSLEEVE RD
NAP-3SQSLEEVE SQ
Sleeve Shade



NAPL-3HEX Hex Louver
NAPL-3DIFF Diffused
NAPL-3LINEAR Linear
Hex Louver and Lenses




NAPL-3SOLITE Solite
NAPL-3SQUARE Square
NAPL-3WIDE Wide
Lens Accessories

3" Flanged Trims

Minimal ceiling flange and compatible with all ceiling types.




NAPF-3RDN
Round Flanged Downlight

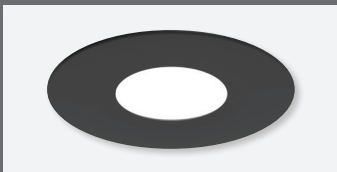


NAPF-3RPH
Round Flanged Pinhole




NAPF-3RWW
Round Flanged Wall Wash

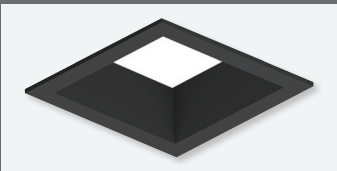

NAPF-3SDN
Square Flanged Downlight

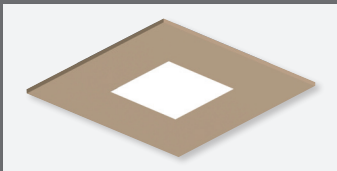

NAPF-3SPH
Square Flanged Pinhole

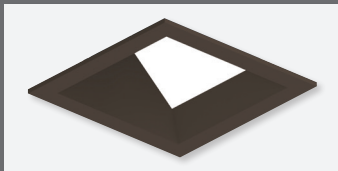


NAPF-3SWW
Square Flanged Wall Wash

3" Flangeless Trims (Trimless or Wood Ceiling)


Knife edge appearance gives a flush /seamless appearance in millwork (wood or stone) & trimless applications.



NAPT-3RDN
Round Flangeless Downlight

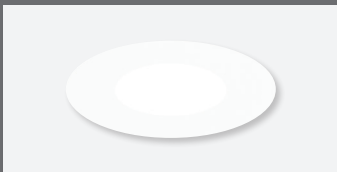


NAPT-3RPH
Round Flangeless Pinhole

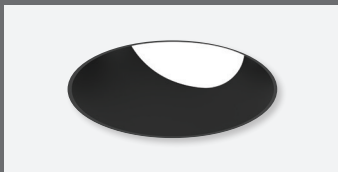


NAPT-3RWW
Round Flangeless Wall Wash



NAPT-3SDN
Square Flangeless Downlight

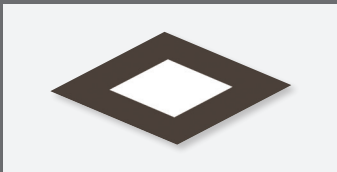

NAPT-3SPH
Square Flangeless Pinhole

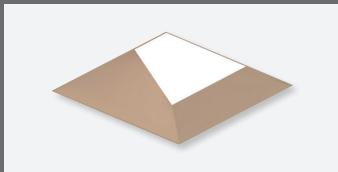


NAPT-3SWW
Square Flangeless Wall Wash

Finishes

Architectural grade with protective e-coating for corrosion protection and durability.



Black




Bronze



Haze



**Matte Powder
White**



**Wheat
Diffused**