

NORA®

JUNCTION BOX HOUSING



IC AIR-TIGHT RECESSED HOUSING
COMPATIBLE WITH 4" LUMINAIRES:
PEARL, AC ONYX AND SLIM

Dedicated new construction housing for use in insulated ceilings can be in direct contact with insulation. Powder coated steel housing meets 2 hour fire rating per international building code section 714 for 1-hour and 2-hour fire rated assemblies. Air-tight construction provides energy savings by reducing the flow of air through the ceiling. The housing is labeled for use with LED downlights or as an outlet box.




NFJB-R4CPA
Cover Plate

4" Junction Box Housing

Patent Pending


Compatible Luminaires

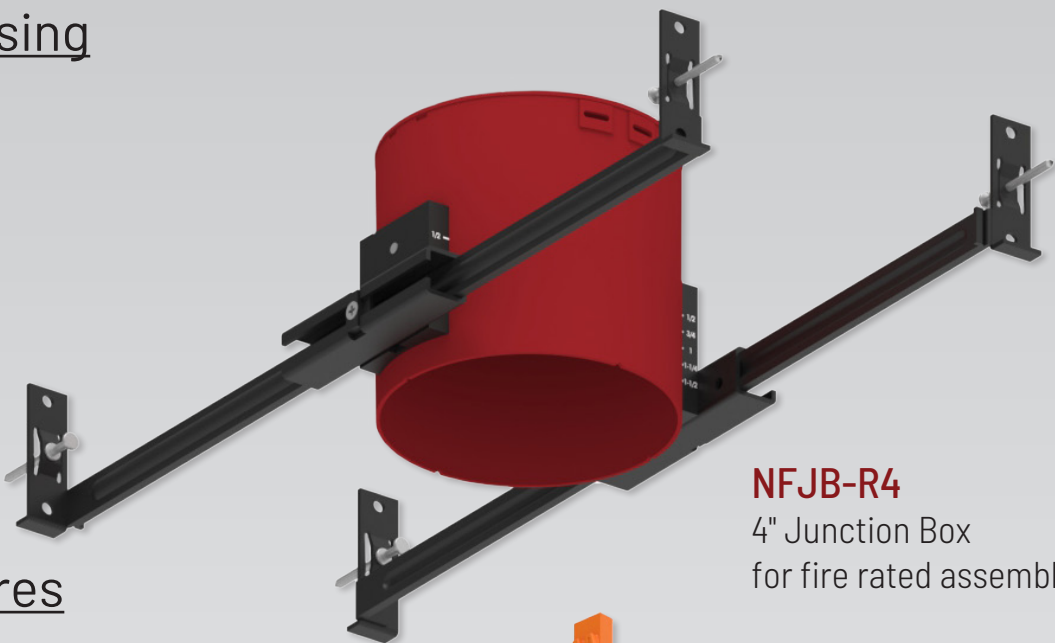

NFJB-R4
4" Junction Box
for fire rated assembly




NOXAC
4" AC Onyx Retrofit

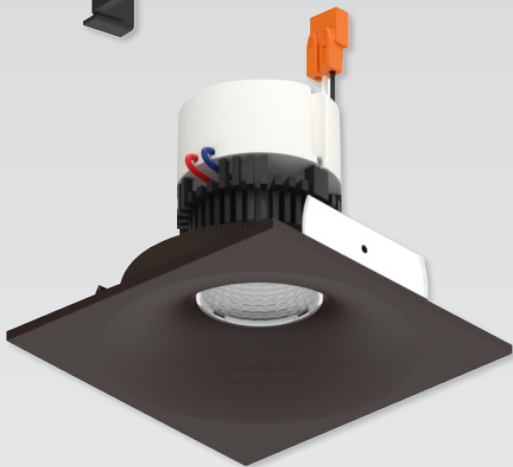

NPR
4" Pearl Retrofit



NSLIM
4" Slim Surface Mount

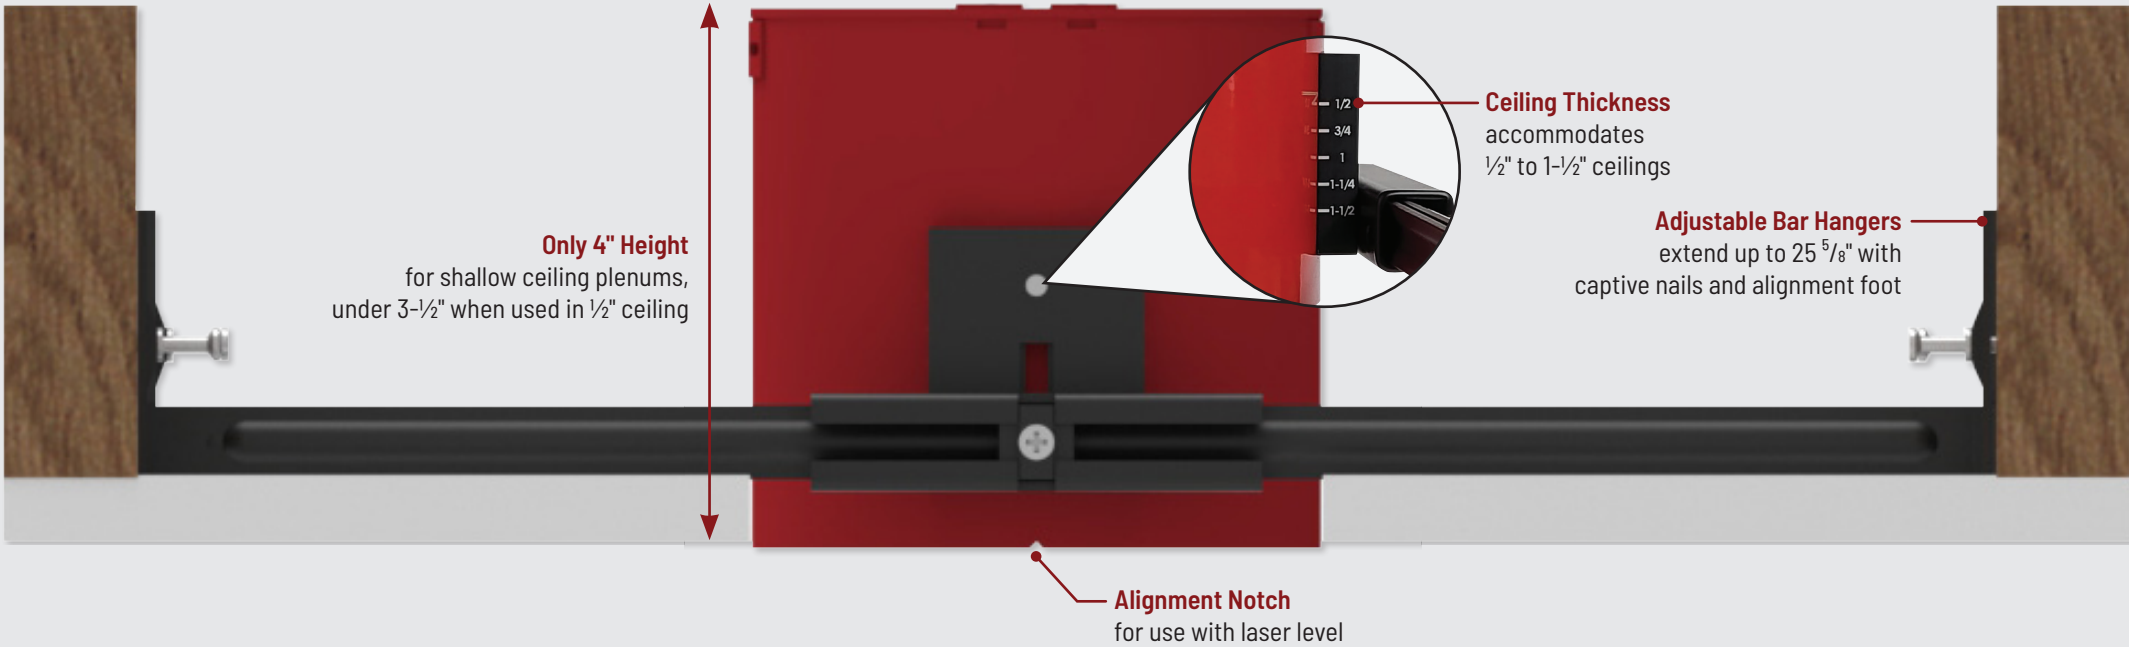

COMPATIBLE LUMINAIRES

Pearl LED Retrofit

Integral Driver
120V input
Triac / ELV dimming

Dedicated CCT
COB LED technology

Field Changeable Optics
Each module includes spot, narrow flood & flood optics

Optional Accessories
can be added anytime
between trim and LED module

WET

NPR-4RC
4" Round Adjustable Cone
25° Adjustability

NPR-4SC
4" Square Adjustable Cone
25° Adjustability

NPR-4RG
4" Round Adjustable Gimbal
25° Adjustability

NPR-4SG
4" Square Adjustable Gimbal
25° Adjustability

NPR-4RNB
4" Round Bullnose
Non-Adjustable

NPR-4SNB
4" Square Bullnose
Non-Adjustable

AC Onyx LED Retrofit

WET

NOXAC-431TWWW
4" AC Onyx Round Reflector
900lm / 11.5W

NOXAC-432TWWW
4" AC Onyx Round Baffle
900lm / 11.5W

WET

NOXAC-4RWTWWW
4" AC Onyx Round Wall Wash
800lm / 11W

NOXAC-4SWTWWW
4" AC Onyx Square Wall Wash
700lm / 11W

WET

NOXAC-4RGTTWWW
4" AC Onyx Adjustable
800lm / 11W

**50K
40K
35K
30K
27K**

Selectable CCT
Five position switch
27K / 30K / 35K / 40K / 50K

15° tilt

Slim LED Surface Mount

WET

NSLIM-4RL1TWMPW
4" Slim Surface Mount
800lm / 11W

NSLIM-4RDTB
Round Face Plate
Black Finish

NSLIM-4RDTS
Round Face Plate
Silver Finish

**50K
40K
35K
30K
27K**

Selectable CCT
Five position switch
27K / 30K / 35K / 40K / 50K

Aluminum Face Plate
can easily be changed to
another finish at anytime



PEARL SERIES

Color Temperature: 2700K 3000K 3500K 4000K **ComfortDim®**
Dedicated CCT

Finish:
NPR-4RC / NPR-4SC: BB, BW, BZ, CMPW, HW, HZMPW, MPW, NN, WW
NPR-4RG / NPR-4SG: BB, BZ, MPW, NN, WW
NPR-4RNB / NPR-4SNB: BB, BZ, MPW, NN, WW

Lumens / Wattage: 750lm to 1200lm / 12W

Dimming: Triac or ELV



ONYX SERIES

Color Temperature: Selectable CCT
2700K 3000K 3500K 4000K 5000K
Selectable CCT

Finish: White

Lumens / Wattage: 700lm to 800lm / 11W

Dimming: Triac or ELV



SLIM SERIES

Color Temperature: Selectable CCT
2700K 3000K 3500K 4000K 5000K
Selectable CCT

Finish: White

Lumens / Wattage: 800lm / 11W

Dimming: Triac or ELV