

NORA®


PEARL 120V

4", 5" & 6" RECESSED LED RETROFIT DELIVERING OVER 1200 LUMENS




Pearl Recessed LED Retrofit luminaires are the high-end, quality solution for easy LED retrofitting in residential and light commercial applications. With a maximum height of just 4-½", Pearl can be retrofitted in most IC and non-IC housings—including shallow! Available in a beautiful array of fixed and adjustable styles in ten finishes, each Pearl includes three field changeable optics for maximum design control. Optional accessories can further customize the fixtures.


FEATURES

- Flanged and Trimless options
- Over 1200lm LED output (750lm with Comfort Dim)
- 2700K, 3000K, 3500K, 4000K or Comfort Dim
- Signify® LED COB or Comfort Dim Technology
- Field changeable optics included (Spot, Narrow Flood and Flood - installed)
- Integral dimmable driver (Triac or ELV)
- Compatible with most IC and non-IC housings
- Includes medium base socket adapter for easy retrofitting in 4" & 6" recessed housings
- cULus classified for wet locations (adjustable trims are damp location)
- 5-Year Limited Warranty
- Certified to the high efficacy requirements of California Title 24 JA8-2025
- Patent Pending

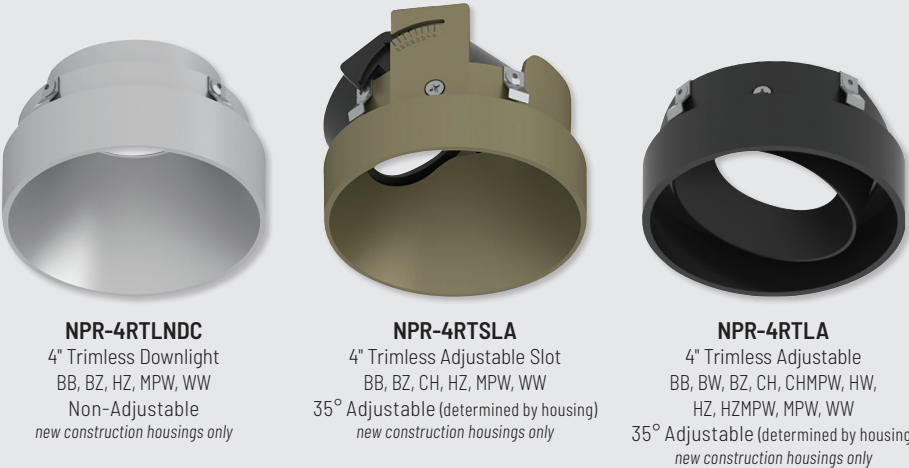

FLANGED TRIMS • 1200LM / 2700K, 3000K, 3500K, 4000K • 750LM / COMFORT DIM

 NPR-4RC SH 4" Round Adjustable Cone Regress BB, BW, BZ, CMPW, HW, HZMPW, MPW, NN, WW 10°-35° Adjustable (determined by housing)	 NPR-4SC SH 4" Square Adjustable Cone Regress BB, BW, BZ, CHMPW HW, HZMPW, MPW, NN, WW 10°-35° Adjustable (determined by housing)	 NPR-4RG SH 4" Round Adjustable Gimbal BB, BZ, MPW, NN, WW 10°-35° Adjustable (determined by housing)	 NPR-4SG SH 4" Square Adjustable Gimbal BB, BZ, MPW, NN, WW 10°-35° Adjustable (determined by housing)	 NPR-4RSLA 4" Round Adjustable Slot BMPW, MPW 30° Adjustable (determined by housing)
 NPR-4RNB 4" Round Bullnose BB, BZ, MPW, NN, WW Non-Adjustable	 NPR-4SNB 4" Square Bullnose BB, BZ, MPW, NN, WW Non-Adjustable	 NPR-4RNDN 4" Round Reflector w/ Round Aperture BB, BW, BZ, CHMPW, HW, HZMPW, MPW, NN, WW Non-Adjustable	 NPR-4SNDN 4" Square Reflector w/ Round Aperture BB, BW, BZ, CHMPW, HW, HZMPW, MPW, NN, WW Non-Adjustable	 NPR-4RPH 4" Fixed Pinhole NPR-4RPHA 4" Adjustable Pinhole - 30° BB, BMPW, HZMPW, MPW
 NPR-4RSL 4" Round Slot Aperture BB, BMPW, HZMPW, MPW 30° Adjustable (determined by housing)	 NPR-4SNDN 4" Square Reflector w/ Square Aperture BB, BW, BZ, CHMPW, HN, HW, HZMPW, MPW, WW Non-Adjustable	 NPR-56RNDN 5 1/8" Round Reflector BB, BW, CHMPW, MPW, WW Non-Adjustable	 NPR-56RSLA 5 1/8" Round Adjustable Slot BMPW, MPW 30° Adjustable (determined by housing)	

FINISHES										
 BB Black	 BMPW Black / Bright White	 BW Black / Warm White	 BZ Bronze	 CMPW Specular Clear Bright White	 CHMPW Champagne Haze Bright White	 HW Haze / Warm White	 HZMPW Haze / Bright White	 MPW Bright White	 NN Natural Metal	 WW Warm White

ACCESSORIES Filter media easily install between module and die-cast trim at any point in the design process.



COMPATIBLE HOUSINGS Most 4" IC and non-IC Fire Rated, Shallow, New Construction and Remodel Housings by Nora and others



(SH) designates reflectors compatible with shallow housings)

NORA®




PEARL LOW VOLTAGE

4", 5" & 6" RECESSED LED RETROFIT DELIVERING OVER 1200 LUMENS

Pearl Recessed LED Retrofit luminaires are the high-end, quality solution for easy LED retrofitting in residential and light commercial applications. With a maximum height of just 4-½", Pearl can be retrofitted in most IC and non-IC housings—including shallow! Available in a beautiful array of fixed and adjustable styles in ten finishes, each Pearl includes three field changeable optics for maximum design control. Optional accessories can further customize the fixtures.

FEATURES

- Flanged and Trimless options
- Over 1200lm LED output (750lm with Comfort Dim)
- 2700K, 3000K, 3500K, 4000K or Comfort Dim
- Easily replace old 12V MR16 trims
- Signify® LED COB or Comfort Dim Technology
- Field changeable optics included (Spot, Narrow Flood and Flood - installed)
- Compatible with Magnetic or Electronic Transformers
- Integral dimmable driver (Triac or ELV)
- Compatible with most IC and non-IC housings
- Includes GU5.3 socket adapter for easy retrofitting
- cULus classified for wet locations (adjustable trims are damp location)
- 5-Year Limited Warranty
- Certified to the high efficacy requirements of California Title 24 JA8-2025
- Patent Pending

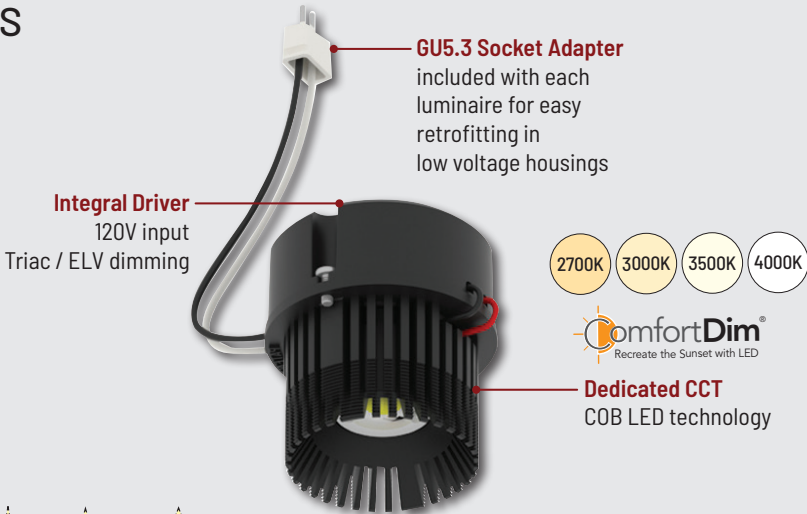

NPR-4RTLND
4" Trimless Downlight
BB, BZ, HZ, MPW, WW
Non-Adjustable
new construction housings only



NPR-4RTSLA
4" Trimless Adjustable Slot
BB, BZ, CH, HZ, MPW, WW
35° Adjustable (determined by housing)
new construction housings only



NPR-4RTLA
4" Trimless Adjustable
BB, BW, BZ, CH, CHMPW, HW, HZ, HZMPW, MPW, WW
35° Adjustable (determined by housing)
new construction housings only



FLANGED TRIMS • 1200LM / 2700K, 3000K, 3500K, 4000K • 750LM / COMFORT DIM




NPRLV-4RC
4" Round Adjustable Cone Regress
BB, BW, BZ, CMPW, HW, HZMPW, MPW, NN, WW
10°-35° Adjustable
(determined by housing)



NPRLV-4SC
4" Square Adjustable Cone Regress
BB, BW, BZ, CHMPW HW, HZMPW, MPW, NN, WW
10°-35° Adjustable
(determined by housing)




NPRLV-4RG
4" Round Adjustable Gimbal
BB, BZ, MPW, NN, WW
10°-35° Adjustable
(determined by housing)




NPRLV-4SG
4" Square Adjustable Gimbal
BB, BZ, MPW, NN, WW
10°-35° Adjustable
(determined by housing)



NPRLV-4RSLA
4" Round Adjustable Slot
BMPW, MPW
30° Adjustable
(determined by housing)




NPRLV-4RNB
4" Round Bullnose
BB, BZ, MPW, NN, WW
Non-Adjustable



NPRLV-4SNB
4" Square Bullnose
BB, BZ, MPW, NN, WW
Non-Adjustable



NPRLV-4RND
4" Round Reflector w/ Round Aperture
BB, BW, BZ, CHMPW, HW, HZMPW, MPW, NN, WW
Non-Adjustable




NPRLV-4SND
4" Square Reflector w/ Round Aperture
BB, BW, BZ, CHMPW, HW, HZMPW, MPW, NN, WW
Non-Adjustable




NPRLV-4RPH
4" Fixed Pinhole
NPRLV-4RPHA
4" Adjustable Pinhole - 30°
BB, BMPW, HZMPW, MPW



NPRLV-4RSL
4" Round Slot Aperture
BB, BMPW, HZMPW, MPW
30° Adjustable
(determined by housing)




NPRLV-4SND
4" Square Reflector w/ Square Aperture
BB, BW, BZ, CHMPW, HN, HW, HZMPW, MPW, WW
Non-Adjustable



NPRLV-56RND
5 1/8" Round Reflector
BB, BW, CHMPW, MPW, WW
Non-Adjustable



NPRLV-56RSLA
5 1/8" Round Adjustable Slot
BMPW, MPW
30° Adjustable
(determined by housing)



BB
Black




BMPW
Black / Bright White



BW
Black / Warm White



BZ
Bronze



CMPW
Specular Clear Bright White



CHMPW
Champagne Haze Bright White




HW
Haze / Warm White



HZMPW
Haze / Bright White



MPW
Bright White




NN
Natural Metal



WW
Warm White

ACCESSORIES Filter media easily install between module and die-cast trim at any point in the design process.



Trimless Mud Plate
4" or 6"
Allows 4" trimless to be installed on various housings




Frosted Filter Optic
60° or 73°
Includes optic and frosted lens



Premium TIR Optic
22° or 26°
Not compatible with Comfort Dim Module



Snoots & Collars
5/8", 3/4" or 1"
Blue, Frost, Amber or Red



Hex Cell Louver
Reduces aperture brightness and light output by about 20%

COMPATIBLE HOUSINGS Most 4" & 6" Low Voltage IC and non-IC Shallow, New Construction and Remodel Housings by Nora and others



NLIC-401 (4")
NLIC-601 (6")
IC Airtight
New Construction



NL-401 (4")
NL-601 (6")
Non-IC
New Construction



NLR-404 (4")
NLR-604 (6")
Non-IC
Remodel



NLIC-402
Shallow IC Airtight
New Construction



NL-402S
Shallow Non-IC
New Construction



NLR-403S
Shallow Non-IC
Remodel

[SH] designates reflectors compatible with shallow housings)