

**NE-932**

**Emergency Dual Remote Heads**

Lamp: 2 x 6V 6W Wedge Base Incandescent

**PRODUCT DESCRIPTION**

Remote head fixtures provide a superior aiming and flexible appearance along with excellent performance. Internal solid state switching automatically activates fixture during power loss. Universal single and dual-head DC remote emergency lighting modules. Connects to any 6V or 12V emergency battery available in most exit or emergency fixtures.

**FEATURES**

- Fully adjustable, glare free light heads with positioning lock
- Reliable slide friction position hold
- 6 Watt lamp(s) included
- Efficient 6 Volt operation
- Injection molded thermoplastic housing

**HOUSING**

Injection molded, thermoplastic housing.

**LENS**

Acrylic molded, thermoplastic housing

**ANGLE ADJUSTABLE**

365° horizontal rotation and 160° vertical adjustment.

**ELECTRICAL**

**Voltage:** 6 Volt or 12 Volt Remote (6 Volt lamp(s) included)

**Lamps:** 6 Volt 6 Watt T5 Wedge Base (included)

**REMOTE**


Use with 6 Volt or 12 Volt remote output (lamp(s) must be replaced for 12 volt operation).

**LABELS AND LISTINGS**

- UL 924 Compliant
- UL Wet Location Listed



**PRODUCT IMAGES & DIMENSIONS**

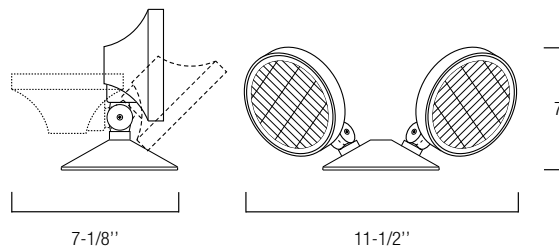

**Emergency Dual Remote Heads**

Catalog No.

**NE-932** Round Grey Double Head / T5 lamp

\*Optional Accessories

**NEXS-P1** = Polycarbonate Vandal / Environmental Resistant Shield (Gasket for Wet Location)

**NEXS-M1** = Metal Shield: 16" L x 8" W x 8" H

Example: **NE-932** = Remote Emergency Adjustable Head