

Installation Instructions

NLOS-R7TW

7" SURF Round LED Regressed Edge-Lit Surface Mount with Selectable CCT

READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN

⚠ WARNING - To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.

⚠ WARNING - This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

⚠ AVERTISSEMENT - Cet équipement est destiné à être installé uniquement par du personnel qualifié. L'installation doit être faite conformément à l'édition actuelle du Code national de l'électricité et à tous les codes de construction locaux et nationaux applicables. L'installation finale doit être approuvée par un ou plusieurs inspecteurs qualifiés en électricité / bâtiment. Une installation incorrecte peut entraîner un incendie ou un risque électrique. Assurez-vous que l'alimentation électrique du circuit a été déconnectée avant d'installer ce système électrique.


⚠ AVERTISSEMENT - Afin de prévenir l'endommagement ou l'abrasion des câbles, éviter tout contact entre ces derniers et le bord d'un objet tranchant tel qu'une tôle.

⚠ AVERTISSEMENT - Ce produit doit être installé selon le code d'installation pertinent, par une personne qui connaît bien le produit et son fonctionnement ainsi que les risques inhérents.


⚠ AVERTISSEMENT - Cet équipement est destiné à être installé uniquement par du personnel qualifié. L'installation doit être faite conformément à l'édition actuelle du Code national de l'électricité et à tous les codes de construction locaux et nationaux applicables. L'installation finale doit être approuvée par un ou plusieurs inspecteurs qualifiés en électricité / bâtiment. Une installation incorrecte peut entraîner un incendie ou un risque électrique. Assurez-vous que l'alimentation électrique du circuit a été déconnectée avant d'installer ce système électrique.



PACKAGING CONTENTS

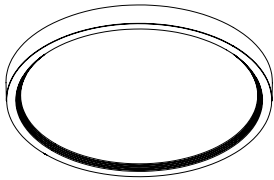


(1) 7" SURF LED Luminaire

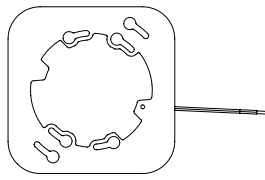

(1) 7" Mounting Bracket




(3) Wire Nuts, Twist-Lock




(2) 8-32 Machine Screws, 1" Long


COMPATIBLE JUNCTION BOXES



4" Octagonal Junction Box
Metallic or Non-Metallic
(Carlson A615)



4" Plastic Round
(Carlson B618R)




4" Square Junction Box

SELECTING COLOR TEMPERATURE

Select the desired color temperature by using the switch located on the back of the luminaire.

NOTE: Luminaire is preset to 3000K. And may change in shipping/ handling / installation.

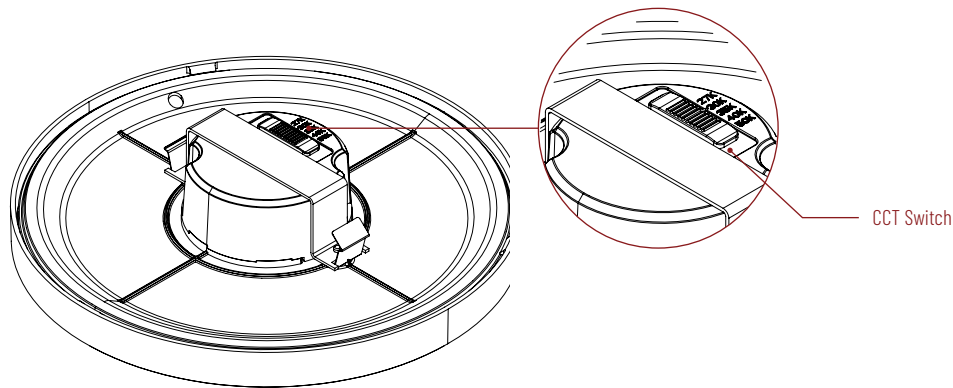

Installation Instructions

NLOS-R7TW


7" SURF Round LED Regressed Edge-Lit Surface Mount with Selectable CCT

READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN

INSTALLATION INSTRUCTIONS


1

Use the designated mounting holes to attach the mounting bracket to a junction box.

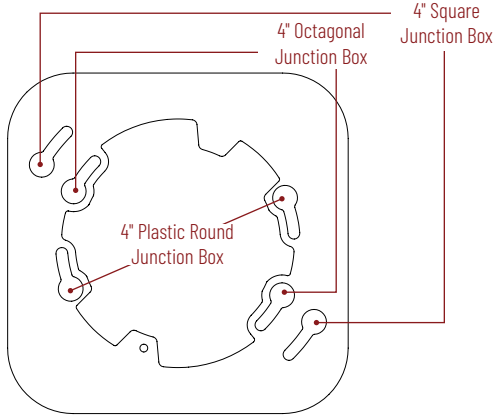


2

Attach the mounting bracket to the junction box by using the two screws (provided).
NOTE: DO NOT OVER TORQUE SCREWS. OVER TORQUING SCREWS WILL DEFORM UNIT.

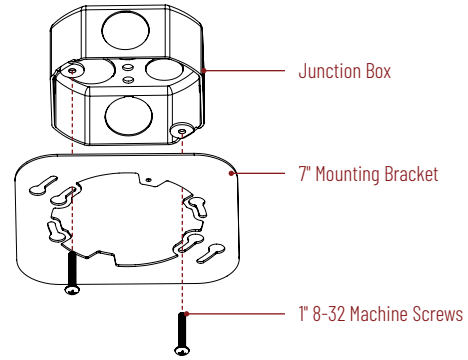

3

Connect the supply leads to the luminaire. White to Neutral, Black to Live, and Green to Ground. Place all wires into the junction box.

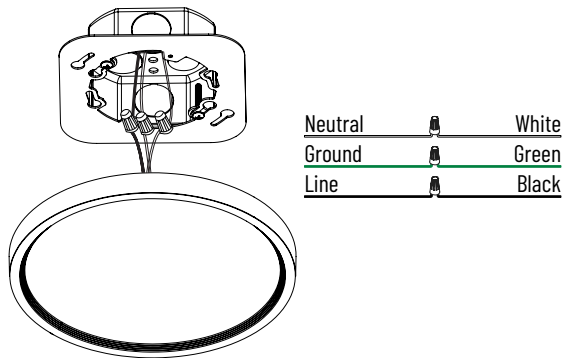

4

Align and insert the two torsion springs to the mounting bracket. Snap to secure.
NOTE: DO NOT OVER TORQUE SCREWS. OVER TORQUING SCREWS WILL DEFORM UNIT.

