

Installation Instructions

NSPDSW-14

1' x 4' LED Surface Mount Panel with Selectable Lumens & CCT


READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN

⚠ IMPORTANT - This equipment is intended to be installed only by qualified personnel. The installation must be made in accordance with the current edition of the National Electrical Code and all applicable state and local building codes. The final installation must be approved by the appropriate, qualified electrical/building inspector(s). Improper installation may result in a fire or electrical hazard. Be sure the electrical power to the circuit has been disconnected before installing this electrical system.


⚠ IMPORTANT - Cet équipement est destiné à être installé uniquement par du personnel qualifié. L'installation doit être faite conformément à l'édition actuelle du Code national de l'électricité et à tous les codes de construction locaux et nationaux applicables. L'installation finale doit être approuvée par un ou plusieurs inspecteurs qualifiés en électricité / bâtiment. Une installation incorrecte peut entraîner un incendie ou un risque électrique. Assurez-vous que l'alimentation électrique du circuit a été déconnectée avant d'installer ce système électrique.



PACKAGING CONTENTS

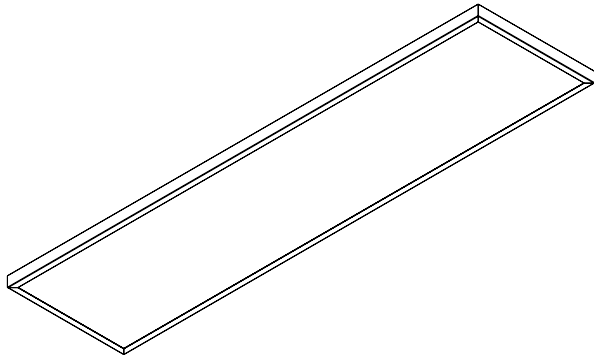

LED Surface Panel




(3) 8-32 x 1" Screws



(4) No. 8 x 1" Screws




(4) Dry Wall Anchors




(3) Wire Nuts

COMPATIBLE JUNCTION BOXES



4" Octagonal Junction Box



4" Round Junction Box

Installation Instructions

NSPDSW-14


1' x 4' LED Surface Mount Panel with Selectable Lumens & CCT

READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN


INSTALLATION INSTRUCTIONS

⚠️ TURN OFF MAIN POWER BEFORE INSTALLATION


- 1** Position the mounting bracket at the desired location and mark the mounting hole locations on the ceiling. Drill holes and install appropriate anchors as required. Secure the bracket with screws into the anchors, then fasten the bracket to the junction box.

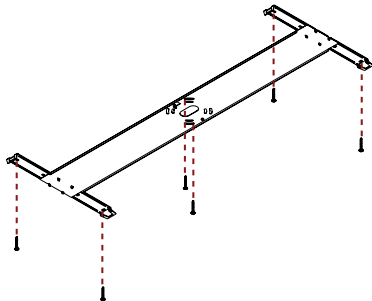


- 2** Attach the safety cable hook to the designate hole on the mounting bracket to support the fixture.

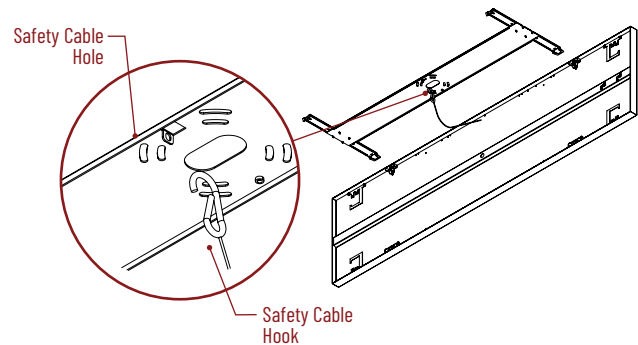


- 3** Lift the fixture and snap the quick-release hooks onto the horizontal mounting tabs of the bracket.

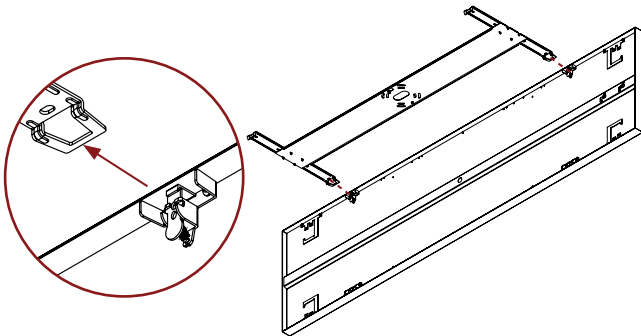


- 4** Connect the fixture wires to the supply wires. Set the desired wattage and color temperature on the fixture.

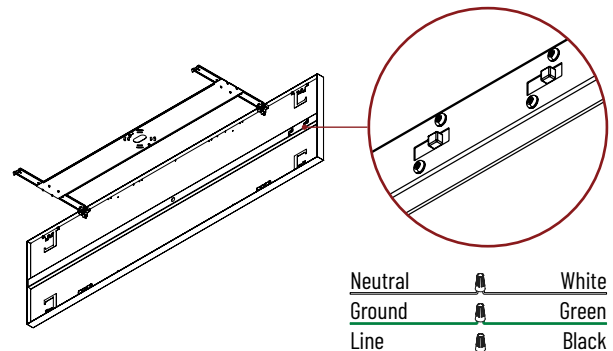

- 5** Swing the fixture upward and engage the spring clips onto the vertical tabs of the mounting bracket.

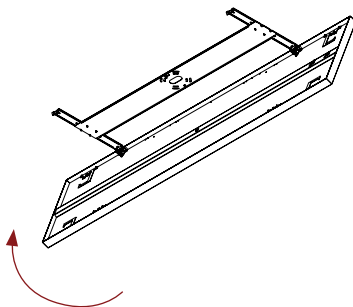

- 6** Push the fixture toward the vertical tabs until it is fully seated against the mounting bracket.

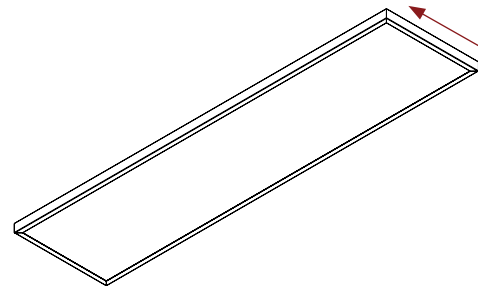

Installation Instructions

NSPDSW-14


1' x 4' LED Surface Mount Panel with Selectable Lumens & CCT

READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN


REMOVAL INSTRUCTIONS

⚠️ TURN OFF MAIN POWER BEFORE REMOVING


- 1** Push the fixture in the direction of the arrows on the short sides of fixture to release it from the secured position

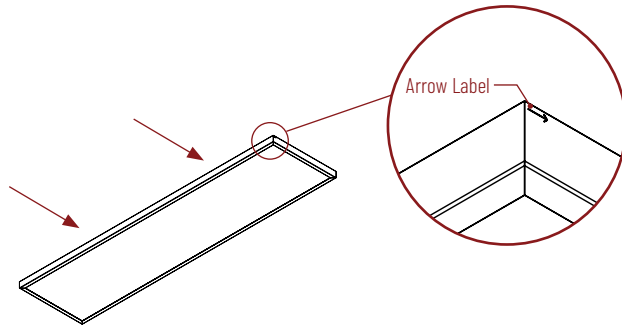


- 2** Swing the fixture downward.

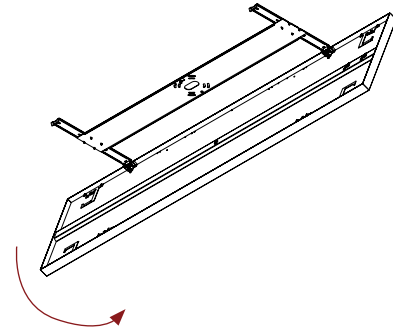

- 3** Disconnect fixture wires from supply wires.

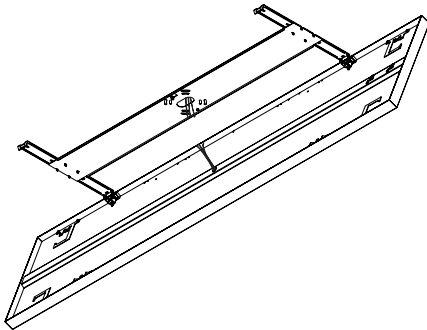

- 4** Disconnect safety cable from mounting bracket.

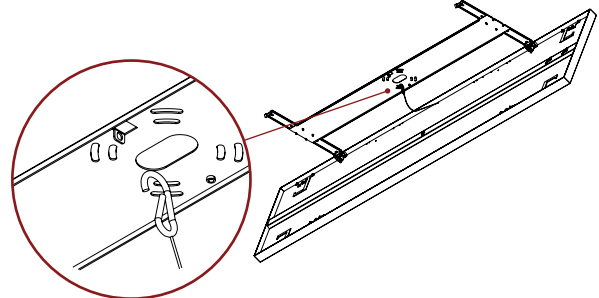

- 5** Pull up on the quick release tabs on fixture to disengage the fixture from the mounting bracket.

