

Installation Instructions

NAPC-3S


Square Extension Collar for 3" Apollo Housings

READ PRIOR TO ATTEMPTING INSTALLATION
ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION
INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN


ITEM NUMBER	CEILING THICKNESS RANGE	COMPATIBLE HOUSING
NAPC-3S05	0.5" to 0.875"	NHAP-3S, NHAPIC-3S
NAPC-3S10	0.875" to 1.25"	NHAP-3S, NHAPIC-3S
NAPC-3S15	1.25" to 1.625"	NHAP-3S, NHAPIC-3S
NAPC-3S20	1.625" to 2"	NHAP-3S, NHAPIC-3S



PACKAGING CONTENTS



Extension Collar



Spacer Tool



Hexbit Tool




(6) M3x3 Set Screws


INSTALLATION INSTRUCTION

⚠️ TURN OFF MAIN POWER BEFORE INSTALLATION

- 1** To replace existing housing collar; loosen (4) set screws with hex bit (included) and remove existing collar.



- 2** Insert new extension collar into housing. Attach the spacer tool (included) to the ceiling using painter's tape.

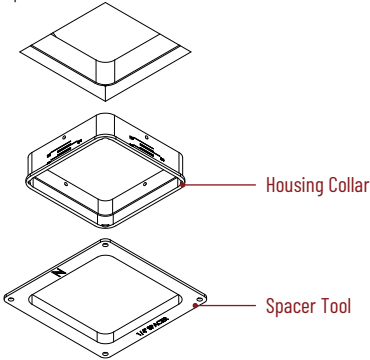

- 3** Ensuring there is a 6mm (1/4") gap between the bottom of the ceiling and the bottom of the collar, tighten the (4) set screws until they are flush with the collar. Finally, remove the spacer tool.

